


FlowMark Model DS-PI-4 Specification Sheet

High Volume Advanced Oxidation

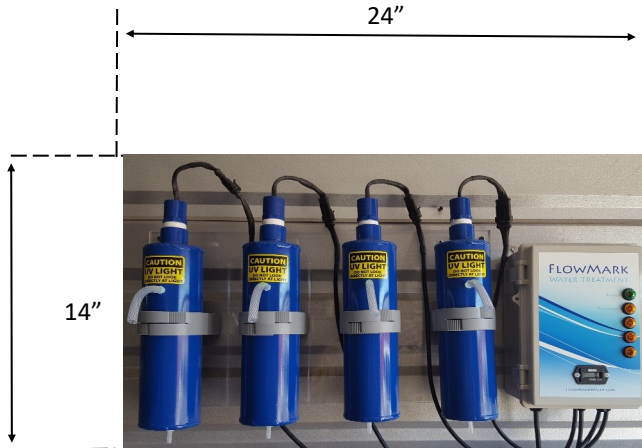

- 1/4" Plexi-Glass Mounting Plate: 24" Wide - 14" Tall
- Shipping Weight 40 Pounds
- Nema 4X Corrosion and Water Resistant Enclosure
- Water Resistant Yellow and Green Indicators
- 10' Molded 120 VAC Power Cord
- Accepts only 120 -VAC
- Power Consumption 100 Watts - 1.5 Amps
- Designed for Continuous Operation
- Digital resettable hour meter

- Four Aluminum Constructed UV Lamp Canisters
- Field Replaceable Premium High Output UV Lamps
- 4 Pin Waterproof Connectors
- Lamp Life = 9,000 hours. (1 Year)
- 1/4" OD Male Barb Fittings accept 1/4" braided tubing.

Internal Components

- Four Electronic UV Lamp Ballasts
- Field Replaceable Ballasts
- Ballast Life = 60,000 + hours
- Internal Temperature = <100 Degrees F
- Ballast Rating = 158 degrees F

- Quad Sch. 80 PVC Injector Manifold
- 1" Inlet and Outlet
- Requires 16 GPM and 30-40 PSI to operate.
- Quad Removable 1/2" Venturis installed with Unions
- Ball Valve for Venturi suction adjustment
- 1/4" Check Valves provide secondary back-flow protection



One Year Manufacturers Warranty