


FlowMark Model Mark - II Specification Sheet

Treats PVC, Copper or Iron Pipe 2" Through 3" Diameter

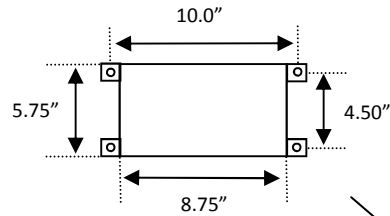

Enclosure Dimensions

- Water and Corrosion Resistant Enclosure
- Super Bright Yellow and Blue LED Indicators
- 10' Signal Cable with Waterproof Connector
- 8' Long Molded 110 VAC Power Cord
- Accepts 110 to 240 VAC (Auto-Switching)
- 10' Long Signal Cable with Waterproof Connector
- Consumes Less than 35 Watts of Power
- Designed for Continuous Operation



- Two Vinyl Covered Treatment Pads 6" X 7.5"
- Brass Coated Grommets
- Six Tie Wraps for Mounting on Pipe
- Maximum Temperature 170 Degrees F (80 Degrees C)
- 20" Long Signal Cable with Waterproof Connector

- PVC Pipe Cover installs over Treatment Pads
- Weather Stripping Installs on Pipe prior to Cover