


## FlowMark Model Mark - III Specification Sheet

Treats PVC, Copper, S.S. or Iron Pipe 4" Through 6" Diameter

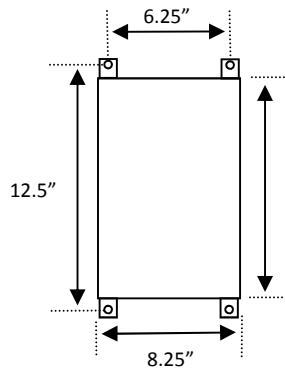

Enclosure Dimensions

- Nema 4X Water-Resistant, Corrosion Resistant Enclosure
- Super Bright Water Resistant Yellow and Blue LED Indicators
- Dry Contact Relay for Remote Monitoring Connection
- 8' Molded 110 VAC Power Cord
- 18" Signal Cable with Waterproof Male Connector
- Accepts 110 - 240 VAC (Auto Switching Internal Power Supply)
- Power Consumption less than 60 Watts
- Designed for Continuous Operation



- Two Vinyl Covered Treatment Pads 8" X 9"
- Brass Coated Grommets
- Six Tie Wraps for Mounting on Pipe
- Maximum Temperature 170 Degrees F (80 Degrees C)

- 20' Long Signal Cable Extension with Waterproof Connectors
- PVC Pipe Cover installs over Treatment Pads
- Weather Stripping Installs on Pipe prior to Cover