


FlowMark Model DS-3 Specification Sheet

Advanced Oxidation System Treats Up To 800 Ton Cooling Towers

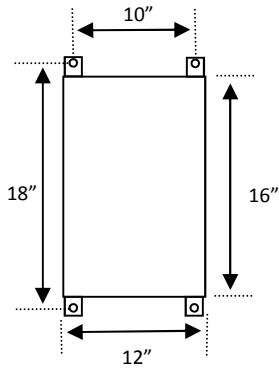

Enclosure Dimensions

- Ventilated Corrosion Resistant Enclosure
- Water Resistant Yellow and Green Indicators
- 10' Molded 120 VAC Power Cord
- Accepts only 120 -VAC
- Power Consumption 90 Watts. 3.0 Amps
- Designed for Continuous Operation

- Two Aluminum Constructed UV Lamp Housings.
- Replaceable UV Lamps.
- 2 X 4 Pin Waterproof Connectors
- Lamp Life = 12,000 hours. (16 mo.)
- 1/4" OD Male Barb Fitting accepts Diffuser tubing.



Internal Components

- Protected by 6 amp Circuit Breaker (ON/OFF Switch)
- Dual Electronic UV Lamp Ballasts
- Piston Driver Air Pump supplies 65 liters/minute air flow at 3.0 PSI.
- 3" Cooling Fan
- Internal Temperature = 125 Degrees F



Internal digital resettable hour meter for lamp hour monitoring.

- Four Sintered Diffusers
- 1/4" Male Barb Connections
- 2 X 25" Long X 1/4" ID Tubing



One Year Manufacturers Warranty